



Whisper-Brite User's Guide



1200

Battery Operated Burnisher

Dear Customer:

Congratulations on the purchase of your new battery burnisher. As you are already aware, the scene of the detailing world is becoming more high tech, and we at Mytee Products, Inc. strive to keep you on the cutting edge with superior quality and technology.

Keep in mind that your battery burnisher is a machine and neglect and abuse will cause unnecessary damage and void warranty. With simple maintenance however, your vacuum will give you quality performance for many years to come.

The labels on your unit are scratch resistant. They are made with a clear film. To achieve a high gloss finish, simply peel off the thin, clear layer.

If warranty questions arise, please consult your user's guide or get in touch with your distributor. If you have questions about maintenance, replacing parts or ordering parts, please call an authorized Mytee Products, Inc. service center. To see an updated list, visit our website at www.Mytee.com.

Before you begin cleaning, please read you user's guide thoroughly.

Sincerely,
Customer Care Dept.

IMPORTANT INFORMATION

Model # _____ Serial # _____

Distributor name and phone# _____

Date of purchase _____

Table of Contents

General Safety	3
Warranty	4
RMA	5
Model Features/ Maintenance	6
Operation	7
Troubleshooting	8
Parts List	9

General Safety/ Warnings

These precautions have been written for your safety and the safety of others in mind. These precautions **MUST BE FOLLOWED** at all times to avoid serious injury, harm, and/or death, and damage to the unit.

Warning: To reduce the risk of fire, electrical shock, or injury:

1. READ ALL INSTRUCTIONS BEFORE USING BATTERY BURNISHER.
2. Use only as described in this manual. Use only manufacturer's recommended attachments.
3. Always unplug charger from electrical outlet before attempting any adjustments or repairs.
4. Do not unplug by pulling on cord. To unplug, grasp the plug, not the cord.
5. Do not pull or carry by cord. Do not close a door on cord or pull cord around sharp edges or corners.
6. Do not allow to be used as a toy. Close attention is necessary when used by or near children.
7. Do not use in areas where flammable or combustible material may be present.
8. Do not leave the unit exposed to harsh weather elements. Temperatures below freezing may damage components and void warranty.
9. Use only the appropriate handles to move and lift unit. Do not use any other parts of this machine for this purpose.
10. Keep hair, loose clothing, fingers, and all parts of body away from all openings and moving parts.

MYTEE LIMITED WARRANTY POLICY

Mytee Products, Inc. endeavors to provide high quality products and product support to its customers and therefore backs up all of its new products purchased from Mytee Products Inc. ("Mytee") or any authorized Mytee distributor/service center with this limited warranty. This limited warranty begins on the date of the customer's purchase and is valid and available to the original purchaser only. Mytee's products are for commercial use only and are not intended for personal, family or household uses.

HOWEVER, OTHER THAN SET FORTH HEREIN, MYTEE GIVES NO WARRANTY, EXPRESS OR IMPLIED, AS TO DESCRIPTION, QUALITY, MERCHANTABILITY, FITNESS FOR ANY PARTICULAR PURPOSE, PRODUCTIVENESS, INFRINGEMENT, OR OTHER MATTER, OF ANY GOODS WHICH MYTEE SHALL SUPPLY. THERE ARE NO WARRANTIES WHICH EXTEND BEYOND THE DESCRIPTION ON THE FACE HEREOF. MYTEE SHALL IN NO WAY BE RESPONSIBLE FOR THE PROPER USE AND APPLICATION OF THE GOODS. MYTEE NEITHER ASSUMES NOR AUTHORIZES ANY OTHER PERSON TO ASSUME FOR MYTEE ANY OTHER LIABILITY IN CONNECTION WITH THE SALE OF MYTEE'S GOODS. THIS LIMITED WARRANTY POLICY MAY BE CHANGED OR WITHDRAWN BY MYTEE AT ANY TIME WITHOUT NOTICE.

WEAR PARTS 90-DAY LIMITED WARRANTY: Mytee will replace all wear parts for 90 days from the date of original purchase. "Wear parts" are items which wear out as a result of usage or the passage of time and are consumed despite attempts to maintain them, such as gaskets, wheels, brass, cords, wires, electrical terminals, hoses, switches, thermostats, plastisol parts, filters, bearings, brushes, solenoids, o-rings, bulbs, heating elements, castors, or other parts deemed wear items in Mytee's sole discretion. This warranty covers the cost of replacement only and does not cover shipping or labor costs.

BATTERIES, AND MOTOR CHARGER 1-YEAR LIMITED WARRANTY: Mytee warrants batteries and motor charger will be free from manufacturing defects, defects in workmanship, and defects in material for one (1) year from the date of original purchase. This warranty does not apply and is void if there are worn brush motors, water damage, chemical build-up, chemical damage, or evidence of abuse, neglect or tampering. This warranty covers the cost of replacement or repair only and does not cover shipping or labor costs.

HOUSING 3-YEAR LIMITED WARRANTY: For three (3) years from the date of purchase, Mytee warrants a percentage of the cost of replacement of rotationally-molded housings pro-rated as follows: Mytee will pay 100% of replacement cost in the first year from the date of purchase, 75% of replacement cost in the second year from the date of purchase and 25% in the third year from the date of purchase. Replacement cost does not include the cost of shipping or labor.

LIMITATION OF DAMAGES: THE REMEDY OF REPLACEMENT OR REPAIR OF ANY DEFECTIVE GOODS SHALL BE THE EXCLUSIVE REMEDY UNDER ANY WARRANTY MADE BY MYTEE, WHETHER EXPRESS OR IMPLIED. IN NO EVENT SHALL MYTEE BE LIABLE FOR ANY INCIDENTAL OR CONSEQUENTIAL DAMAGES, PROPERTY DAMAGES, OR PERSONAL INJURIES.

All limited warranties are void for, and Mytee does not warrant in any way, any product that evidences misapplication, improper installation, abuse, lack of maintenance, negligence in use or care, abnormal use, alteration of design, use of incompatible or corrosive chemicals, use in a rental service, and/or servicing, installation of parts, or repairs by anyone other than Mytee or a Mytee authorized distributor or service center. Mytee may make changes in products it manufactures and markets at any time; these changes are made without obligation to change, retrofit, or upgrade any

product previously sold or manufactured.

Mytee has no obligation to honor the limited warranties set forth herein unless the original purchaser, promptly upon discovering the warranty claim and prior to continuing to use the product, contacts Mytee or a Mytee authorized distributor or service center to describe the claim and to receive and follow instructions for documenting and resolving the claim. In addition, the purchaser must provide the product to which the claim applies to Mytee or a Mytee authorized distributor or service center for a thorough inspection.

If any provision or portion of this limited warranty policy is found to be unenforceable, then the remaining provisions and portions shall remain valid and enforceable. If any provision or portion of this limited warranty policy is found to be limited by law, then that provision or portion shall be construed to make it effective within the bounds of law. For example, if there are legal limitations on the duration of warranties, the warranties made herein shall be construed to have the minimum duration required by law, or, if there are legal limitations of exclusion of remedies, the exclusions made herein shall be construed to apply to the fullest extent possible without violating the law.

The validity, construction and performance of this warranty policy shall be governed by the laws of the State of California, without respect to conflicts of laws principles. The exclusive jurisdiction of any legal action arising from or related to this warranty policy shall be in the State of California and no legal action shall be commenced elsewhere.

RETURNED MATERIAL AUTHORIZATION PROCEDURE

It is the responsibility of any Authorized Service Center (ASC) or Distributor with written authorization to ensure the Customers equipment is repaired as soon as possible. Only Mytee Products, Inc. or it's authorized dealers with written authorization, service centers, and agents may make warranty repairs on these products. All others do so at their own risk and expense.

The Distributor must follow Mytee Products, Inc. standard RMA procedure:

1. When a repair falls within the Warranty time period for a piece of equipment, the Distributor will fill out a RMA/Warranty claim form. This form will act as a repair order to replace any defective parts.
2. All defective parts must be returned to Mytee Products, Inc. with the RMA/claim form for evaluation at the customer's expense. **This shipping is non-refundable.** All warranty claims are subject to an evaluation by Mytee Products, Inc. to determine if warranty will be approved. Any credit for repair and/or parts will only be issued upon evaluation and approval from Mytee Products, Inc.
3. When Warranty is approved, the Distributor's account will be credited for the replacement part(s). Mytee Products, Inc. will ship the warranted replacement part(s) to the Distributor prepaid. If Warranty is denied the Distributor's account will not be credited for any parts sent for this claim.

MODEL FEATURES/ MAINTENANCE

1200/ Whisper Brite™

The 1200 Whisper Brite™ delivers these Mytee advantages:

Features:

- Regulated to maintain a constant 2000-RPM and consistent tork.
- Low voltage cutout that will interrupt operation of machine at 32VDC (100% discharge by battery manufacturer). This will ensure long battery life and minimum recharge time.
- 5 cycle “Smart” on board battery charger

Maintenance:

There is little maintenance required. The pad should be checked before every use and will need to be changed periodically and the water level in the batteries should be checked every month.

Battery Care:

Battery Maintenance:

1. Open the vent caps and check the electrolyte level; the minimum level is to the top of the plates.
2. If there is no water visible, add just enough to cover the plates.
3. Put batteries on a complete charge before adding any more water.
4. Once charging is completed, open the vent caps and check the electrolyte level.
5. Add water until the electrolyte level is 1/8” below the bottom of the fill well.
6. Clean, replace, and tighten all vent caps.

WARNING: NEVER ADD ACID TO A BATTERY

CHARGE ONLY IN WELL-VENTILATED AREAS.

KEEP SPARKS OR FLAMES AWAY FROM A CHARGING BATTERY.

AVOID CHARGING AT TEMPERATURES ABOVE 120° F

CAUTION: THE ELECTROLYTE IS A SOLUTION OF ACID AND WATER, SO SKIN CONTACT SHOULD BE AVOIDED.

Important things to Remember:

1. Do not let plates get exposed to air.
2. Do not fill the water all the way up to the cap.
3. Do not use water with a high mineral content.
4. Use only distilled or deionized water.



Operation

Operating Instructions:

1. To operate, lift red on/off knob (2). Lower head assembly by lifting the pad lift lever on the back side of the machine (3).
2. Squeeze one or both of the operation levers (4) and start burnishing by pushing machine in a slow and steady path.


Instructions for changing the pad:

- A. Lift pad with the Pad Lift Lever to the second notch.
- B. Tilt pad head up.
- C. Remove centering device by squeezing metal fingers.
- D. Remove pad.
- E. Install new pad.
- F. Replace centering device by pushing up until locked.

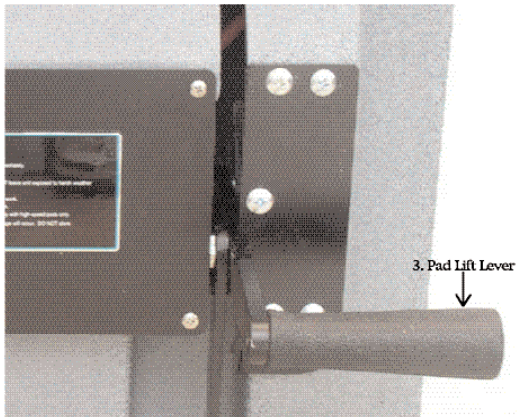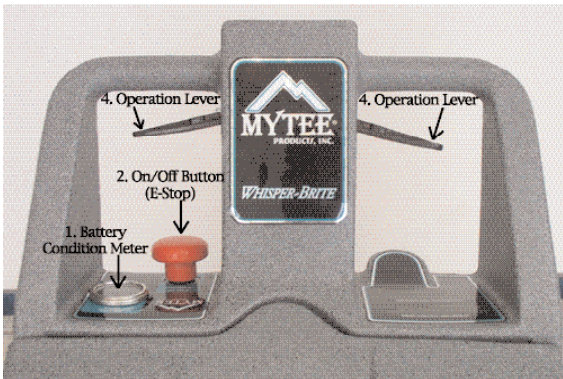



DESCRIPTION	PART NUMBER
Motor	C372
Motor controller	WB001
Battery charger	
Charge cord	E783
100 amp fuse	
Battery	E773
Battery condition meter	E77



DESCRIPTION	PART NUMBER
Switch	H796
Switch lever	H795
Switch bracket	16878-A
Centering device	H799
Pad driver	H800
Pad	H431
E-Stop button	



DESCRIPTION	PART NUMBER
Dust collection bag	G027
Dust guard	H801
4" caster	H786
8" wheel	H787